



PIPE

SPECIFICATIONS

ASTM A106/ASME SA106 B & C
ASTM A53B/ASME SA53B
ASTM A333/ASME SA333 Grd 1/6
ASTM A335/ASME SA335
ASTM A500 Grd B & C
API 5L X52
API 5L X42
API 5LB
ASTM A252 Grd 2 & 3
ASTM A53 Type F
AWWA C200
NACE MR-01-75



SURFACE CONDITIONS


Mill Lacquered
Galvanized
Bare
KleenKote®

END FINISHES

Beveled
Square
Threaded
Threaded & Coupled
Grooved

SPECIAL FEATURES

Size range 1/8" to 48"
High strength guaranteed to 52,000 yield and above
Pipe to A860 chemistry for fittings conversion
Low carbon pipe for low temp/charpy applications
A/SA 106B normalized
Variety of surface and end finishes
Wheelabrating and sandblasting
Heavy walls
Multiple lengths to minimize waste

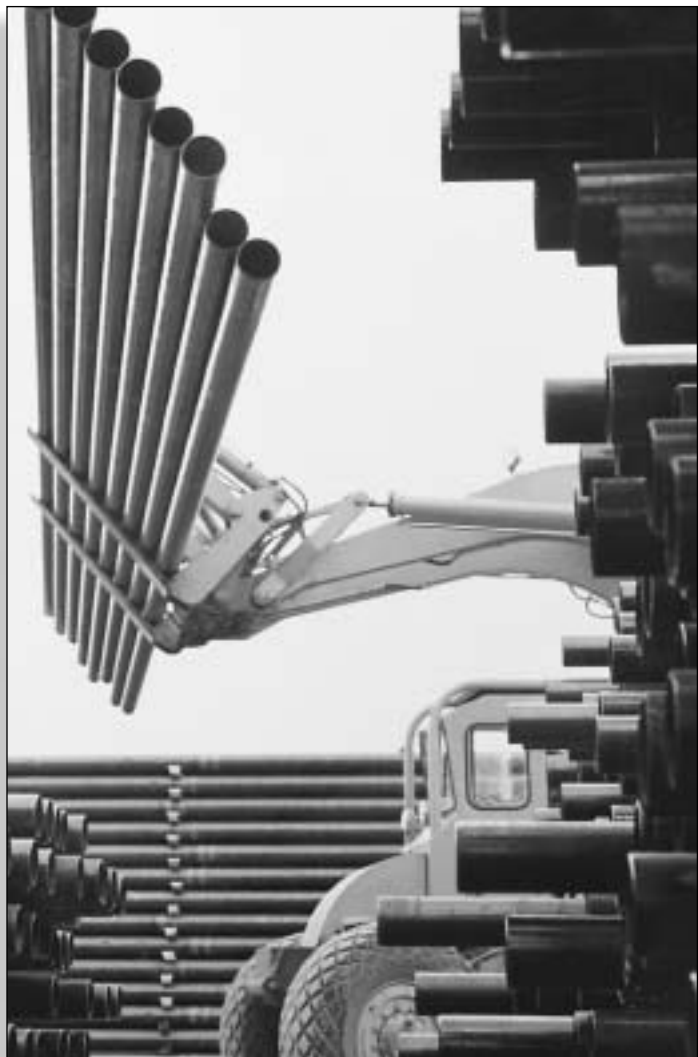



Tubular Steel Inc.

PIPE

PIPE

| SIZE | O.D. | WALL | SCHED. | WT./FT. | SIZE | O.D. | WALL | SCHED. | WT./FT. |
|---------------|---------------|-------|--------|---------|---------------|---------------|-------|--------|---------|
| 1/8" | .405" | .068" | STD/40 | 0.24 | 2 1/2" | 2.875" | .188" | | 5.40 |
| | | .095" | XH/80 | 0.31 | | | .203" | STD/40 | 5.79 |
| 1/4" | .540" | .088" | STD/40 | 0.42 | | | .276" | XH/80 | 7.66 |
| | | .119" | XH/80 | 0.54 | | | .375" | 160 | 10.01 |
| 3/8" | .675" | .091" | STD/40 | 0.57 | | | .552" | XXH | 13.70 |
| | | .126" | XH/80 | 0.74 | 3" | 3.500" | .188" | | 6.63 |
| 1/2" | .840" | .109" | STD/40 | 0.85 | | | .216" | STD/40 | 7.58 |
| | | .147" | XH/80 | 1.09 | .300" | XH/80 | 10.25 | | |
| | | .187" | 160 | 1.30 | .438" | 160 | 14.32 | | |
| | | .294" | XXH | 1.71 | .600" | XXH | 18.58 | | |
| 3/4" | 1.050" | .113" | STD/40 | 1.13 | 3 1/2" | 4.000" | .188" | | 7.65 |
| | | .154" | XH/80 | 1.47 | | | .203" | | 8.23 |
| | | .218" | 160 | 1.94 | | | .226" | STD/40 | 9.11 |
| | | .308" | XXH | 2.44 | | | .318" | XH/80 | 12.51 |
| 1" | 1.315" | .109" | Sch 10 | 1.40 | | | .636" | XXH | 22.85 |
| | | .133" | STD/40 | 1.68 | 4" | 4.500" | .120" | | 5.61 |
| | | .179" | XH/80 | 2.17 | | | .125" | | 5.84 |
| | | .250" | 160 | 2.84 | | | .156" | | 7.24 |
| .358" | XXH | 3.66 | .188" | | | | 8.64 | | |
| 1 1/4" | 1.660" | .109" | Sch 10 | 1.81 | | | .203" | | 9.32 |
| | | .140" | STD/40 | 2.27 | | | .237" | STD/40 | 10.79 |
| | | .191" | XH/80 | 3.00 | | | .250" | | 11.35 |
| | | .250" | 160 | 3.77 | | | .337" | XH/80 | 14.98 |
| 1 1/2" | 1.900" | .382" | XXH | 5.21 | | | .438" | 120 | 19.01 |
| | | .109" | Sch 10 | 2.09 | | | .531" | 160 | 22.51 |
| | | .145" | STD/40 | 2.72 | 4 1/2" | 5.000" | .674" | XXH | 27.54 |
| | | .200" | XH/80 | 3.63 | | | .247" | STD | 12.54 |
| 2" | 2.375" | .281" | 160 | 4.86 | | | .355" | XH | 17.61 |
| | | .400" | XXH | 6.41 | 5" | 5.563" | .188" | | 10.76 |
| | | .109" | Sch 10 | 2.63 | | | .219" | | 12.50 |
| | | .154" | STD/40 | 3.65 | | | .258" | STD/40 | 14.62 |
| | | .190" | | 4.43 | | | .375" | XH/80 | 20.78 |
| | | .218" | XH/80 | 5.02 | | | .500" | 120 | 27.04 |
| | | .280" | | 6.26 | | | .625" | 160 | 32.96 |
| .344" | 160 | 7.44 | .750" | XXH | | | 38.55 | | |
| .436" | XXH | 9.03 | | | | | | | |



PIPE

| SIZE | O.D. | WALL | SCHED. | WT./FT. | SIZE | O.D. | WALL | SCHED. | WT./FT. |
|-------|--------|-------|--------|---------|-------|---------|--------|--------|---------|
| 6" | 6.625" | .125" | | 8.68 | 9" | 9.625" | .343" | | 33.90 |
| | | .156" | | 10.78 | | | .500" | 48.72 | |
| | | .188" | | 12.89 | 10" | 10.750" | .156" | | 17.65 |
| | | .219" | | 14.97 | | | .188" | 21.15 | |
| | | .250" | | 17.02 | | | .219" | 24.60 | |
| | | .280" | STD/40 | 18.97 | | | .250" | 20 | 28.04 |
| | | .344" | | 23.08 | | | .279" | | 31.20 |
| | | .375" | | 25.03 | | | .307" | 30 | 34.24 |
| | | .432" | XH/80 | 28.57 | | | .365" | STD/40 | 40.48 |
| | | .500" | | 32.71 | | | .438" | | 48.24 |
| | | .562" | 120 | 36.39 | | | .500" | XH/60 | 54.74 |
| | | .625" | | 40.05 | | | .593" | 80 | 64.33 |
| | | .718" | 160 | 45.30 | | | .718" | 100 | 76.93 |
| .864" | XXH | 53.16 | .843" | 120 | 89.20 | | | | |
| 7" | 7.625" | .301" | STD | 23.57 | | 1.000" | 140 | 104.10 | |
| | | .375" | | 29.04 | | 1.125" | 160 | 115.70 | |
| | | .500" | XH | 38.05 | 11" | 11.750" | .375" | | 45.55 |
| | | .875" | XXH | 63.08 | | | .400" | | 48.49 |
| 8" | 8.625" | .156" | | 14.11 | .500" | XH | | 60.07 | |
| | | .188" | | 16.90 | 12" | 12.750" | .188" | | 24.20 |
| | | .219" | | 19.64 | | | .203" | | 27.22 |
| | | .250" | 20 | 22.36 | | | .219" | | 29.28 |
| | | .277" | 30 | 24.70 | | | .250" | 20 | 33.38 |
| | | .312" | | 27.70 | | | .312" | | 41.51 |
| | | .322" | STD/40 | 28.55 | | | .330" | 30 | 43.77 |
| | | .375" | | 33.04 | | | .375" | STD | 49.56 |
| | | .406" | 60 | 35.64 | | | .406" | 40 | 53.53 |
| | | .438" | | 38.30 | | | .438" | | 57.59 |
| | | .500" | XH/80 | 43.39 | | | .500" | XH | 65.42 |
| | | .593" | 100 | 50.87 | | | .562" | 60 | 73.22 |
| | | .625" | | 53.40 | | | .688" | 80 | 88.57 |
| | | .718" | 120 | 60.63 | | | .750" | | 96.12 |
| | | .812" | 140 | 67.76 | | | .843" | 100 | 107.20 |
| | | .875" | XXH | 72.42 | | | 1.000" | 120 | 125.49 |
| | | .906" | 160 | 74.71 | | | 1.125" | 140 | 139.68 |
| | | | | | | | | 1.312" | 160 |



Tubular Steel Inc.

PIPE

PIPE

| SIZE | O.D. | WALL | SCHED. | WT./FT. | SIZE | O.D. | WALL | SCHED. | WT./FT. | |
|--------|---------|--------|--------|---------|-------------|--------|-------------|--------|---------|-------|
| 14" | 14.000" | .219" | | 32.23 | 18" (cont.) | | .438" | 30 | 82.06 | |
| | | .250" | 10 | 36.71 | | | .500" | XH | 93.45 | |
| | | .281" | | 41.21 | | | .562" | 40 | 104.80 | |
| | | .312" | | 45.68 | | | .750" | 60 | 138.20 | |
| | | .344" | | 50.14 | | | .937" | 80 | 170.80 | |
| | | .375" | STD/30 | 54.57 | | | 1.156" | 100 | 208.00 | |
| | | .438" | 40 | 63.37 | | | 1.375" | 120 | 244.10 | |
| | | .500" | XH | 72.09 | | | 1.562" | 140 | 274.20 | |
| | | .593" | 60 | 84.91 | | | 1.781" | 160 | 308.50 | |
| | | .750" | 80 | 106.10 | | | 20" 20.000" | .250" | 10 | 52.73 |
| | | .937" | 100 | 130.70 | | | | .281" | | 59.23 |
| | | 1.093" | 120 | 150.70 | | | | .312" | | 65.71 |
| | | 1.250" | 140 | 170.20 | | | | .344" | | 72.16 |
| | | 1.406" | 160 | 189.10 | | | | .375" | STD/20 | 78.60 |
| | | | .406" | | 84.96 | | | | | |
| 16" | 16.000" | .188" | | 31.75 | .438" | | 91.41 | | | |
| | | .219" | | 36.87 | .500" | XH/30 | 104.10 | | | |
| | | .250" | 10 | 42.05 | .593" | 40 | 122.90 | | | |
| | | .281" | | 47.22 | .625" | | 129.33 | | | |
| | | .312" | 20 | 52.36 | .688" | | 141.90 | | | |
| | | .344" | | 57.48 | .750" | | 154.19 | | | |
| | | .375" | STD/30 | 62.58 | .812" | 60 | 166.40 | | | |
| | | .438" | | 72.72 | 1.031" | 80 | 208.91 | | | |
| | | .500" | XH/40 | 82.77 | 1.281" | 100 | 256.10 | | | |
| | | .562" | | 92.66 | 1.500" | 120 | 296.40 | | | |
| | | .656" | 60 | 107.50 | 1.750" | 140 | 341.10 | | | |
| | | .750" | | 122.15 | 1.968" | 160 | 379.00 | | | |
| | | .843" | 80 | 136.50 | 22" 22.000" | .250" | 10 | 58.07 | | |
| | | 1.031" | 100 | 164.80 | | .281" | | 65.24 | | |
| 1.218" | 120 | 192.30 | .312" | | | 72.38 | | | | |
| 1.437" | 140 | 223.50 | .375" | STD/20 | | 86.61 | | | | |
| 1.593" | 160 | 245.10 | .406" | | | 97.70 | | | | |
| | | | .438" | | | 100.75 | | | | |
| 18" | 18.000" | .188" | | 35.76 | .500" | XH/30 | 114.80 | | | |
| | | .219" | | 41.59 | .562" | | 128.67 | | | |
| | | .250" | 10 | 47.39 | .593" | | 135.58 | | | |
| | | .281" | | 53.22 | .625" | | 142.68 | | | |
| | | .312" | 20 | 59.03 | .656" | | 149.54 | | | |
| | | .344" | | 64.82 | | | | | | |
| | | .375" | STD | 70.59 | | | | | | |
| | | .406" | | 76.34 | | | | | | |



PIPE

| SIZE | O.D. | WALL | SCHED. | WT./FT. | SIZE | O.D. | WALL | SCHED. | WT./FT. | |
|-------------|--------|--------|--------|---------|-------------|-------|-------|--------|---------|--------|
| 22" (cont.) | | .688" | | 156.60 | 28" 28.000" | | .312" | | 92.26 | |
| | | .875" | | 197.40 | | | | .375" | STD | 110.60 |
| | | 1.125" | 80 | 250.80 | | | | .500" | XH/20 | 146.80 |
| | | 1.375" | 100 | 302.88 | | | .625" | | 182.70 | |
| | | 1.625" | 120 | 353.60 | 30" 30.000" | | .281" | | 89.27 | |
| | | 1.875" | 140 | 403.00 | | | | .312" | 10 | 98.93 |
| | | 2.125" | 160 | 451.10 | | | .344" | | 108.88 | |
| 24" 24.000" | | .250" | 10 | 63.41 | | | .375" | STD | 118.60 | |
| | | .281" | | 71.25 | | | .500" | XH/20 | 157.50 | |
| | | .312" | | 79.06 | | | .625" | 30 | 196.10 | |
| | | .344" | | 86.65 | 32" 32.000" | | .312" | 10 | 105.60 | |
| | | .375" | STD/20 | 94.62 | | | | .375" | STD | 126.70 |
| | | .406" | | 102.31 | | | | .500" | XH/20 | 168.20 |
| | | .438" | | 110.10 | | | .625" | 30 | 209.40 | |
| | | .500" | XH | 125.49 | | | .688" | 40 | 230.10 | |
| | | .562" | 30 | 140.80 | 34" 34.000" | | .281" | | 101.19 | |
| | | .594" | | 148.49 | | | | .344" | 10 | 123.70 |
| | | .625" | | 156.60 | | | | .375" | STD | 134.70 |
| | | .688" | 40 | 171.20 | | | | .500" | XH/20 | 178.90 |
| | | .750" | | 186.24 | | | .625" | 30 | 222.80 | |
| | | .812" | | 201.09 | | | .688" | 40 | 244.80 | |
| | | .968" | 60 | 238.10 | 36" 36.000" | | .312" | 10 | 118.90 | |
| | | 1.218" | 80 | 296.40 | | | | .344" | | 131.00 |
| | | 1.531" | | 367.40 | | | | .375" | STD | 142.70 |
| | | 1.812" | | 429.40 | | | | .406" | | 154.34 |
| | | 2.062" | | 483.10 | | | .500" | XH/20 | 189.60 | |
| | 2.343" | | 541.90 | | | .562" | | 212.70 | | |
| 26" 26.000" | | .281" | | 77.18 | | | .625" | 30 | 236.10 | |
| | | .312" | | 85.60 | 40" 40.000" | | .312" | | 132.25 | |
| | | .375" | STD | 102.60 | 42" 42.000" | | .312" | | 138.91 | |
| | | .406" | | 110.98 | | | .375" | STD | 166.70 | |
| | | .438" | | 119.44 | | | .500" | XH | 221.60 | |
| | | .500" | XH/20 | 136.20 | 48" 48.000" | | .375" | STD | 190.70 | |
| | | .562" | | 152.68 | | | | .500" | XH | 253.60 |
| | | .688" | | 185.99 | | | | | | |
| | | .750" | | 202.25 | | | | | | |